


Tekniske data

Fluke BP290 2400 mAh High Capacity Li-Ion Battery for Fluke 190-Series-II

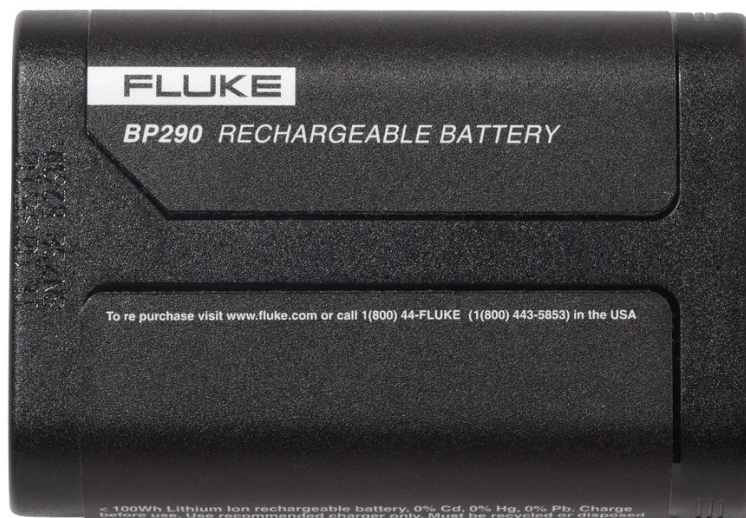

Nøkkelfunksjoner

- 2400 mAh rechargeable Li-ion battery
- Compatible with ScopeMeter® 190 Series III, 190 Series II, 120B Series, MDA-500 Series Motor Drive Analyzers and 430-II Series Power Quality Analyzers

Produktoversikt: Fluke BP290 2400 mAh High Capacity Li-Ion Battery for Fluke 190-Series-II

The Fluke BP290 Li-ion Battery is a standard capacity battery for use in Fluke 190 Series II and Series III ScopeMeter Test Tools, 120B Series ScopeMeter Test Tools, MDA-500 Series III Motor Drive Analyzers and 430-II Series Power Quality Analyzers. BP290 Li-ion batteries include a charge-status indicator so you can quickly and easily verify charge status in the field, and may be charged either in the instrument itself, or using the optional [Fluke BP290 External Charger](#). For situations requiring longer battery operating time consider the [Fluke BP291 4800 mAh High Capacity Li-Ion Battery](#).

Spesifikasjoner: Fluke BP290 2400 mAh High Capacity Li-Ion Battery for Fluke 190-Series-II

Baery

Li-ion, 10.8 V, 2500 mAh, 27 Wh configuration 3ICR19/66

Safety	Pollution degree 2
Operating temperature	0 u00b0C to + 50 u00b0C (charging may slow or stop at environmental temperatures > 40 u00b0C)
Storage temperature	-20 u00b0C to + 60 u00b0C
Recommended storage temperature	< 35 u00b0C
Humidity	0 u00b0C to 10 u00b0C noncondensing tt10 u00b0C to 30 u00b0C @ 95 % (u00b15 %) rh tt30 u00b0C to 40 u00b0C @ 75 % (u00b15 %) rh
Altitude	3000 m
Weight	175 g
Dimensions	22 mm x 85 mm x 59 mm

Modeller



Fluke BP290

2400 mAh High Capacity Li-Ion Battery for Fluke 190-series II

Fluke. *Keeping your world up and running.®*

Fluke Norge AS
Postboks 383
1411 Kolbotn
Tlf: 800 18 227
E-mail: cs.no@fluke.com
www.fluke.no

©2024 Fluke Corporation. Med enerett.
Informasjonen kan endres uten varsel. Vi tar
forbehold om trykkfeil.
11/2024

**Endring av dette dokumentet er ikke tillatt uten
skriftlig tillatelse fra Fluke Corporation.**